

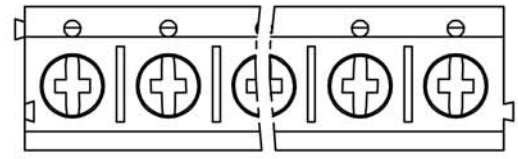
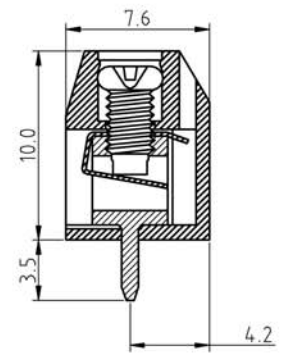


SIGN	DESCRIPTION	DATE	APPROVER

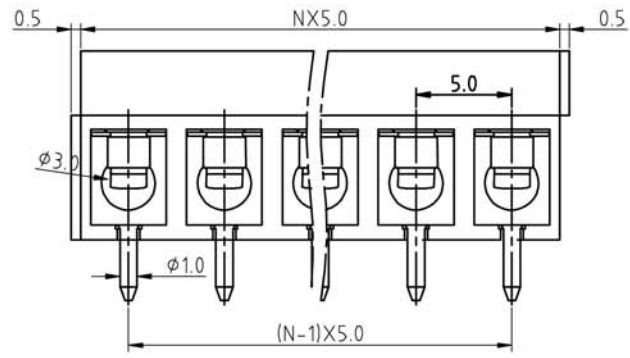

N=Number of contacts

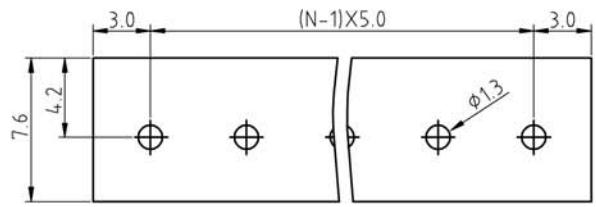

P.C.B. LAYOUT

Technical Data:

Material:

- Terminal: Copper Alloy Tin plated
- screw: Steel galvanized with Cr3+ plated
- Wire guard: Stainless steel
- Insulator body(housing): Polyamide(UL94V-0)

Electrical

- Voltage rating: 250VAC
- Current rating: 15 Amps/way max
- Contact resistance: 20mΩ(max)
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 14-24AWG

Mechanical:

- Torque: 4.0kgf.cm/M2.5
- Operating temperature: -40°C to +105°C
- Soldering reliability: Test temperature= 250°C±10°C
- 5 seconds max

Ordering Information:

F11 - 2 - 5 XX - X 0 0 X 0

- 2 02
- 24 24
- 5 Green
- 0 3.2
- 6 Blue
- 1 3.5
- 8 Grey
- A Black
- 1 "-" SCREW
- 2 "-/+" SCREW

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X: ±0.50	CHECKED:	F11 - 2 - pitch 5.0mm
X.X ±0.30	DRAWN: Yang Ming 2012,06,20	- series
X.XX ±0.20	UNITS: mm	REV: A
X° ±1°	SCALE: 4 / 1	PAGE: 1 / 1
		PART NO: F1125XX200X0
		DWG NO: 9F1125001A