

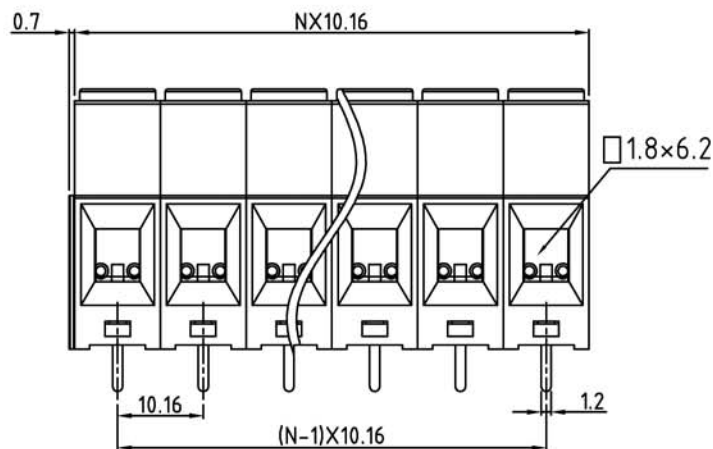


N=Number of contacts

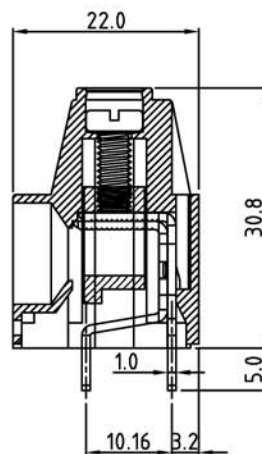

P.C.B. LAYOUT

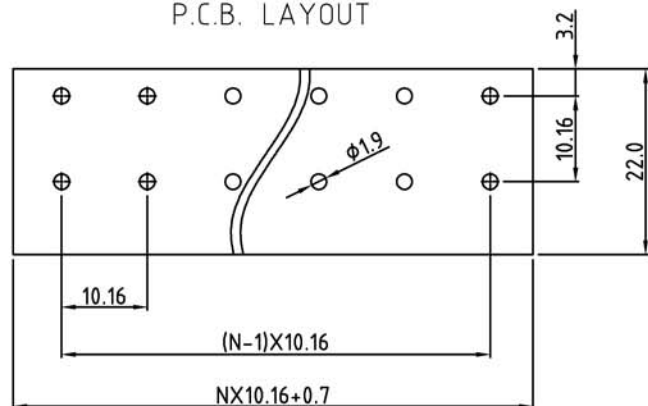

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Contact(metal housing): Steel galvanized with Cr3+ plated

Terminal screw: Steel galvanized with Cr3+ plated

Solder Pin: Copper Alloy with Tin plated

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 600VAC

Current rating: 64 Amps/way max

Contact resistance: 20mΩ (max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 6-20AWG

Mechanical:

Torque: 16.0kgf.cm/M4

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C /5 seconds max

Ordering Information:

F36-7-K XX-X X 0 X 0 0 0 0

1 01
4 04
24 24

5 Green
6 Blue
A Black

0 Double Row Double Pin
1 Single Row Single Pin
2 Single Row Double Pin
3 Double Row Four Pin
4 Single Row Four Pin

1 "-"Screw
2 "-/+“Screw

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X. ±0.50	CHECKED:	F36 - 7 Pitch 10.16mm
X.X ±0.30	DRAWN: Yang Ming 2014,12,17	-Double Row Double Pin Series
X.XX ±0.20	UNITS: mm	(single pole interlocked body)
X° ±†	REVISION: A	PART NO: F367KXXX00X0000
⊕	SCALE: 1.5/ 1	PAGE: 1 / 1
		DWG NO: 9F367K001A