

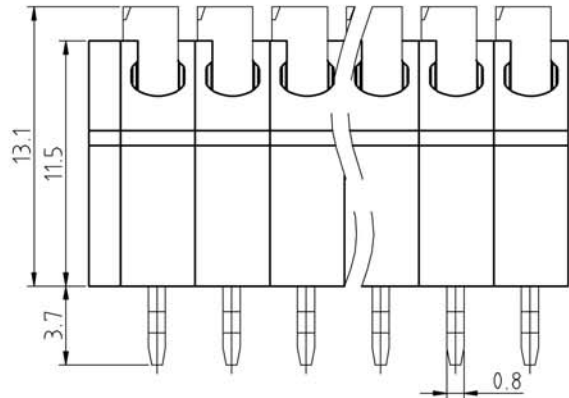



SIGN	DESCRIPTION	DATE	APPROVER

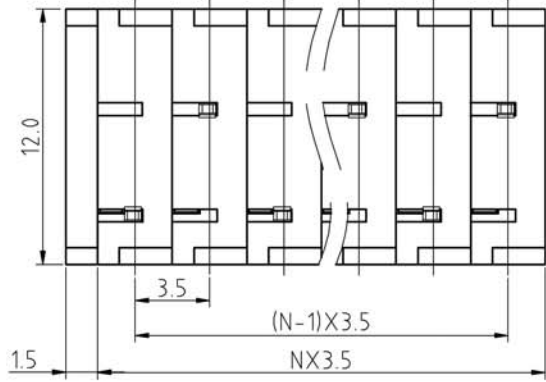

N=Number of contacts=2 thru 24

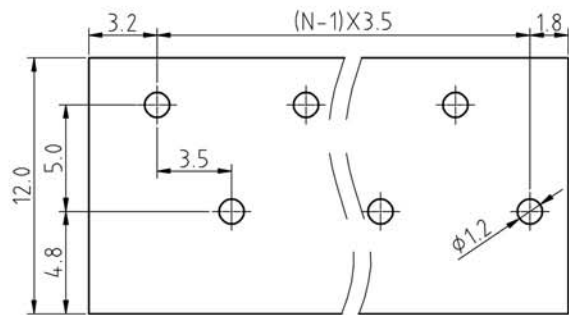

P.C.B. LAYOUT

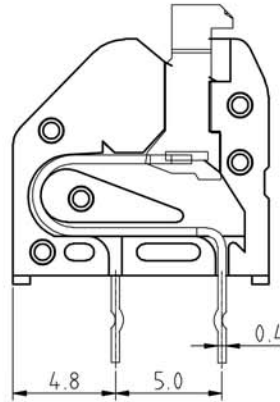

Material

- Terminal body(Contact pin) : PhBz
- Wire guard :
- Surface of solder tail : Tin plated
- Insulator (housing): Thermoplastic(Glass filled) (UL94V-0)
- Voltage rating: 300V
- Current rating: 5A
- Wire range: 0.5-0.75mm²
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Wire strip length: 6-7mm
- Withstanding Voltage: 2.0KV
- Operating temperature: -40°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec

Ordering Information:
F53-22-3 XX-0 0 X 0

- 5 Green
 - 6 Blue
 - 8 Grey
 - A Black
- 2 02
4 04
24 24

WELINK 上海拓尔普电子科技有限公司
Welink International Co.,LTD.

TOLERANCE	APPROVED:	NAME: F53-22- Pitch 3.5mm
X ±0.50	CHECKED:	- series
X.X ±0.30	DRAWN: Yang Ming 2012,06,20	PART NO: F53223XX10X0
X.XX ±0.20	UNITS: mm	REV: A
X° ±1°	SCALE: 4 / 1	PAGE: 1 / 1
		DWG NO: 9F5322302A