
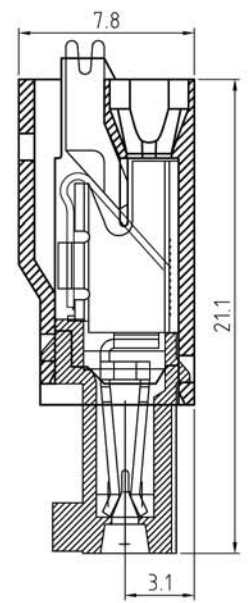
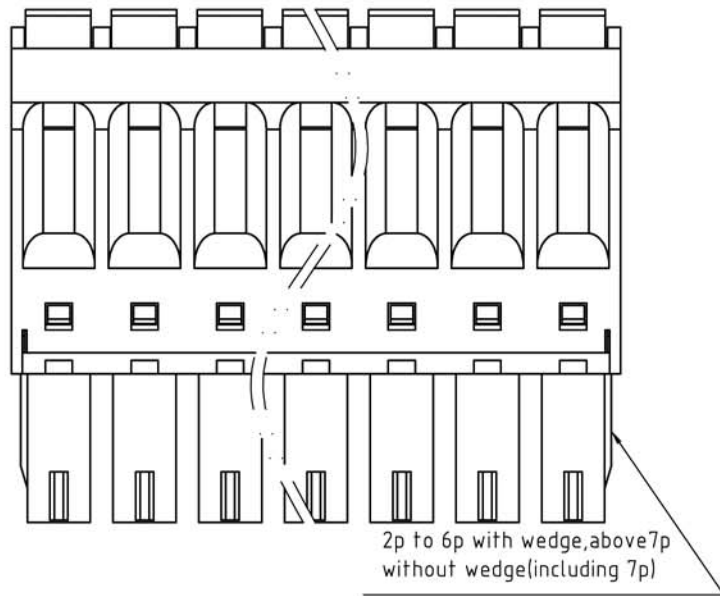


SIGN	DESCRIPTION	DATE	APPROVER

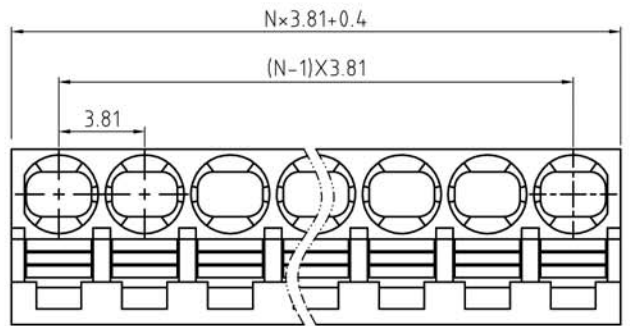

N=Number of contacts

Technical Data:

Material:

- terminal: Copper Alloy with Tin plated
- Spring Clamp: Stainless steel
- Insulator body(housing): Polyamide(UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 12 Amps/way max
- Contact resistance: 20mΩ(max)
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 16-24AWG

Mechanical:

- Operating temperature: -40°C to +105°C
- Soldering reliability:
 - Test temperature= 250°C±10°C
 - 5 seconds max

Ordering Information:

F73 - J - C XX - 0 0 0 X 0

- 2 02
- ~ ~
- 24 24
- 5 Green
- 6 Blue
- 8 Grey
- A Black

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME: F73 - J - pitch3.81mm
X. ±0.50	CHECKED:	- series
X.X ±0.30	DRAWN: Ling Yu	2014.07.12
X.XX ±0.20	UNITS: mm	REV: A
X° ±1°	SCALE: 4 / 1	PAGE: 1 / 1
⊕	PART NO: F73JCXX000X0	DWG NO: 9F73JC001A