
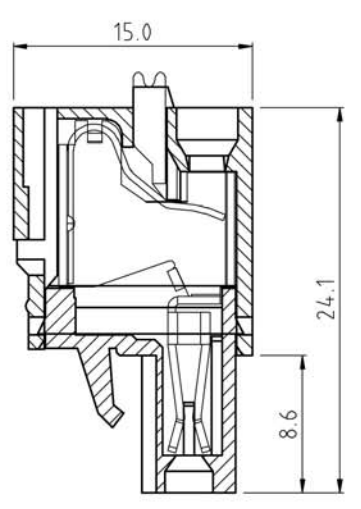


N=Number of contacts

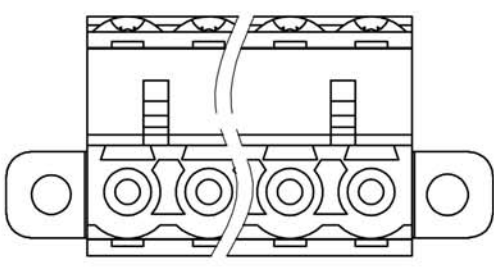

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:
 Material:
 Terminal: Copper Alloy, Tin plated.
 Wire guard: Copper Alloy,
 Insulator body(housing): Polyamide(UL94V-0)
 Electrical:
 Voltage rating: 300VAC
 Current rating: 16 Amps/way max
 Contact resistance: 20mΩ (max)
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
 Wire range: 12-26AWG
 Mechanical:
 Operating temperature: -40°C to +105°C
 Soldering reliability:
 Test temperature= 250°C±10°C
 5 seconds max
 Ordering Information:
 F75-I-E XX-0 X X 0
 2 02 5 Green
 - - 6 Blue
 24 24 0 Without Flange
 1 With Flange

WELINK 上海拓尔普电子科技有限公司
 Welink International Co., LTD.

TOLERANCE X ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED: CHECKED: DRAWN: Yang Ming 2012,06,20	NAME: F75-I -Pitch 5.08mm -Series
UNITS: mm	REV: A	PART NO: F75IEXX001X0
SCALE: 3 / 1	PAGE: 1 / 1	DWG NO: 9F75IE001A