
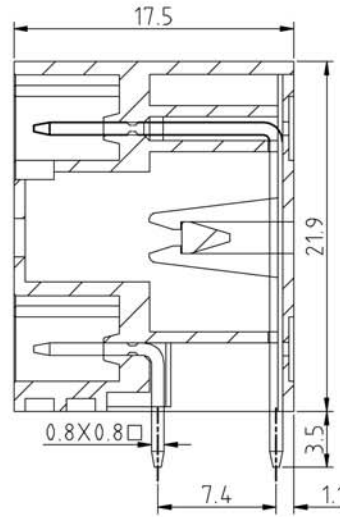


SIGN	DESCRIPTION	DATE	APPROVER

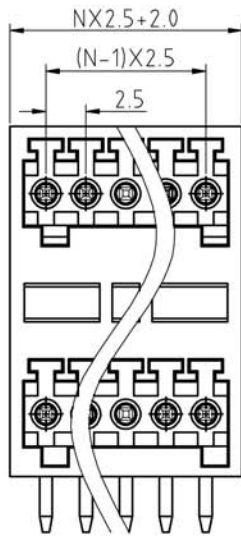

Technical Data:

Material:

Solder Pin: Copper Alloy Tin plated

Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 12 Amps/way max

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C


5 seconds max

Ordering Information:

F83 - J - 2 XX - 0 0 X 0

2 02      5 Green  
 24 24      6 Blue  
                  8 Grey  
                  A Black

N=Number of contacts

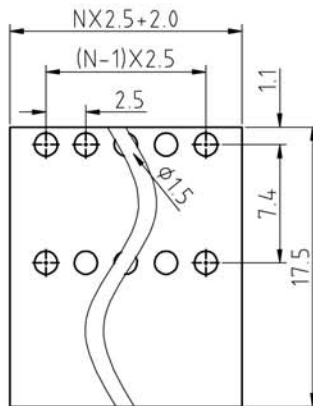

P.C.B. LAYOUT

<b>WELINK</b> 上海拓尔普电子科技有限公司		Welink International Co.,LTD.	
TOLERANCE	APPROVED:	NAME: F83-J- Pitch 2.5mm	
X ±0.30	CHECKED:	-series	
X.X ±0.15	DRAWN: Yang Ming 2012,06,20	PART NO: F83J2XX000X0	
X.XX ±0.05	UNITS: mm REV: A	DWG NO: 9F83J2001A	
X° ±1°	SCALE: 3 / 1 PAGE: 1 / 1		