
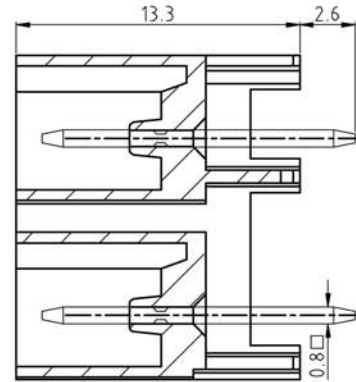


SIGN	DESCRIPTION	DATE	APPROVER

N=Number of contacts

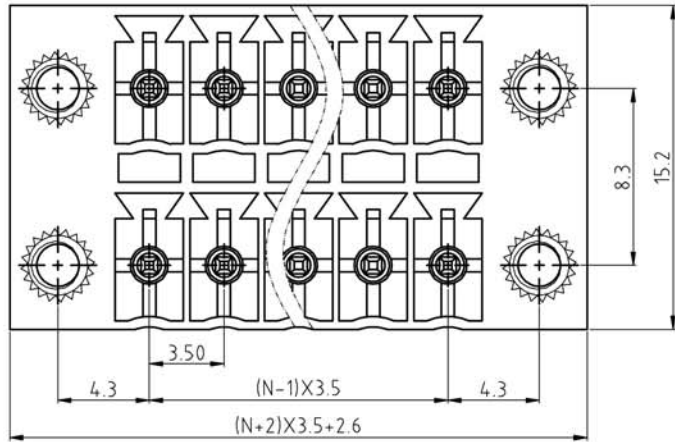

Technical Data:

Material:

Solder Pin: Copper Alloy Tin plated

Metal nut: Copper Alloy

Insulator body(housing): Polyamide
(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 12A

Withstanding Voltage: AC 2500V(1min)

Mechanical:


Using temperature Range: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+250^{\circ}\text{C}$, 5seconds Max.

Ordering Information:

F83-T-3 XX-0 0 0 X 0

02	2Pin	5	Green
To	To	6	Blue
24	24Pin	A	Black

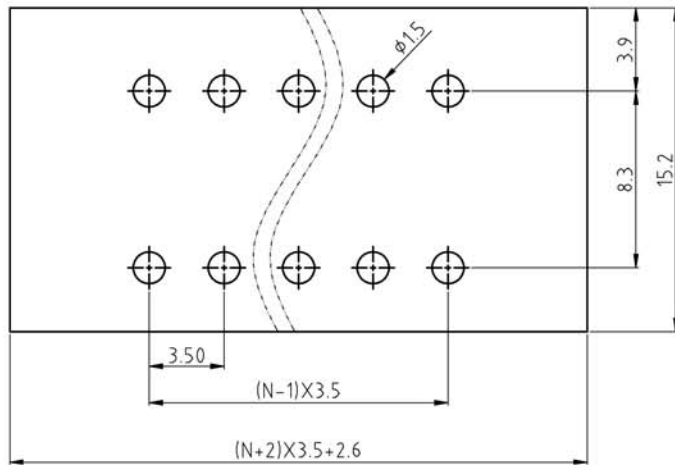

PCB. LAYOUT

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X ± 0.30	CHECKED:	F83-T Pitch 3.5mm
X.X ± 0.15	DRAWN: YangMing 2012,06,20	-Series
X.XX ± 0.05	UNITS: mm	REV: A
X° $\pm 1^{\circ}$	SCALE: 4 / 1	PAGE: 1 / 1
		PART NO: F83T3XX000X0
		DWG NO: 9F83T3001A