
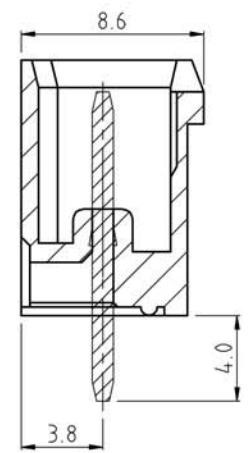


SIGN	DESCRIPTION	DATE	APPROVER


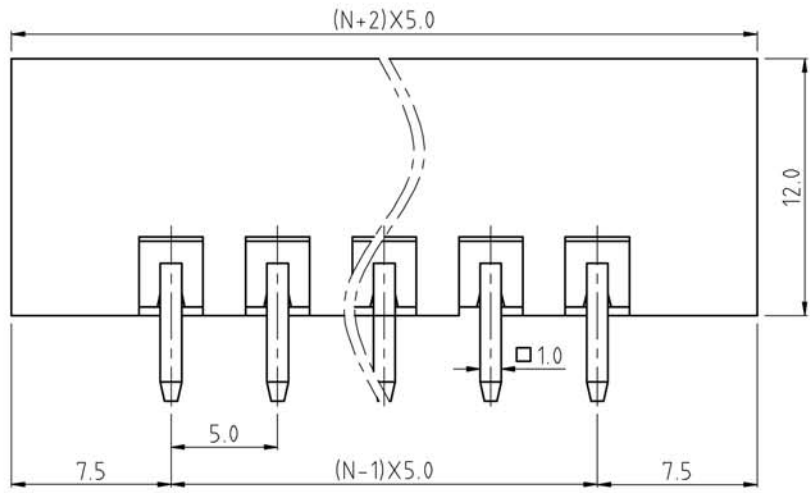


Technical Data:
Material:
Solder Pin: Copper Alloy, Tin plated
Metal nut: Copper Alloy
Insulator body(housing): Polyamide
(Glass filled)(UL94V-0)
Electrical
Voltage rating: 300VAC
Current rating: 16A
Withstanding Voltage: AC 2500V(1min)
Mechanical:
Using temperature Range: -40°C to +105°C
Soldering temperature: +250°C, 5seconds Max.

Ordering Information:
F85-6-5 XX-0 0 0 X 0

02 2Pin
To To 5 Green
24 24Pin 6 Blue
A Black

N=Number of contacts

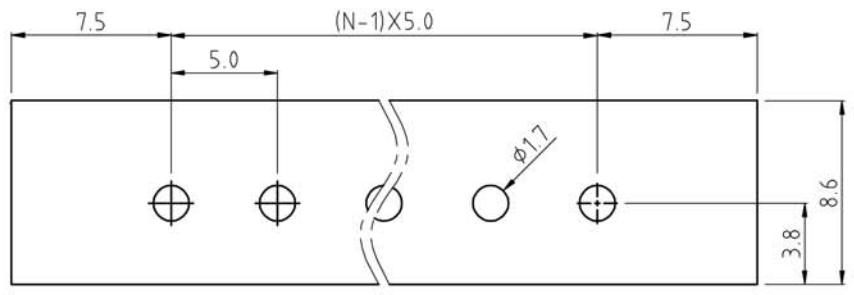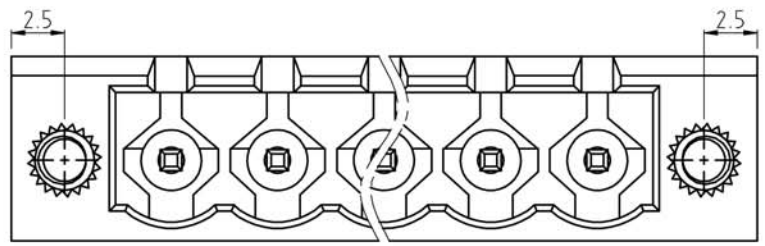

P.C.B. LAYOUT

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME: F85-6 Pitch 5.0mm
X: ±0.50	CHECKED:	- Series
X.X: ±0.30	DRAWN: YangMing 2012,06,20	PART NO: F8565XX000X0
X.XX: ±0.20	UNITS: mm	REV: A
X°: ±1°	SCALE: 4 / 1	PAGE: 1 / 1
		DWG NO: 9F8565001A