
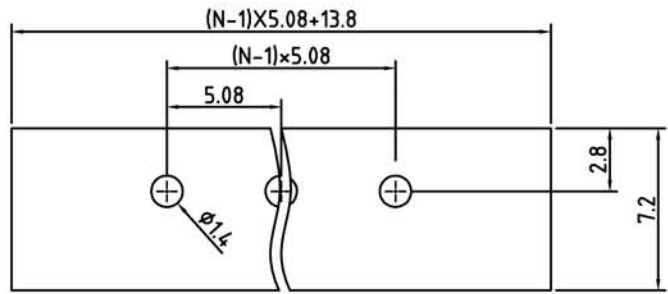
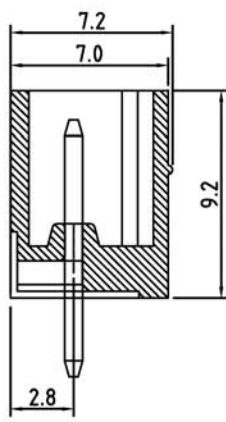
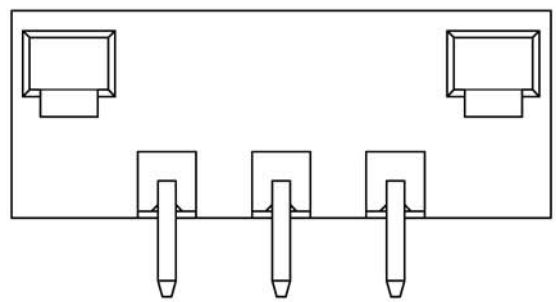


SIGN	DESCRIPTION	DATE	APPROVER
△	-----	2006,10,05	TONY

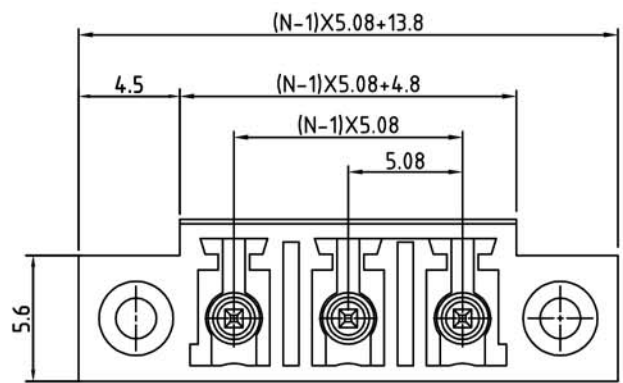

Technical Data:
Material:
Solder Pin: Copper Alloy Tin plated
Metal nut: Copper Alloy
Insulator body (housing): Polyamide (Glass filled) (UL94V-0)
Electrical
Voltage rating: 300VAC
Current rating: 12 Amps/way max
Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Mechanical:
Operating temperature: -40°C to +105°C
Soldering reliability:
Test temperature= 250°C±10°C
5 seconds max

Ordering Information:
F8 3-2-E XX 0 0 0 X 0 0 0 0

- 02 2Pin
- To To
- 24 24Pin
- 5 Green
- 6 Blue
- A Black
- 1 180°
- 2 90°
- 0 Open
- 1 Close
- 2 Screw nut
- 3 Square nut

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED:	NAME: F83-2 Pitch 5.08mm
	CHECKED:	-seriec (Square nut 180°)
	DRAWN: Liren	2016,12,10
	UNITS: mm	REV: A
	SCALE: 4 / 1	PAGE: 01 / 01
		PART NO: F832EXX013X0000
		DWG NO: 9F832E001A