

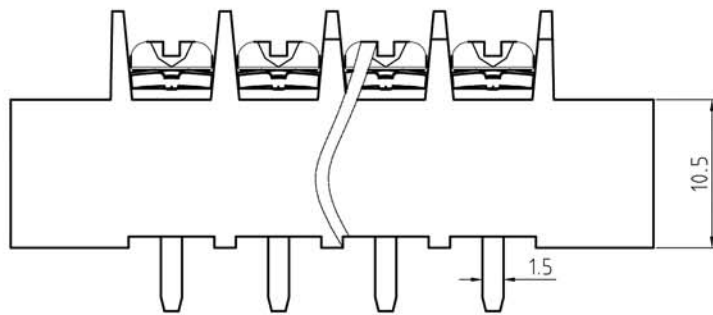


N=Number of contacts

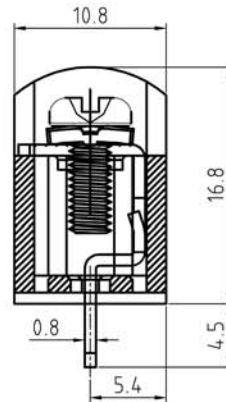

P.C.B LAYOUT

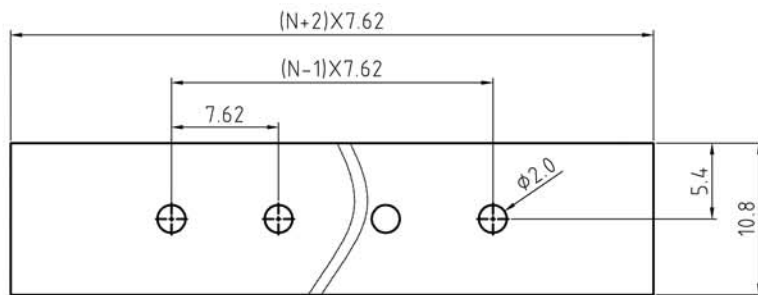

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Terminals: Copper Alloy, Tin Plated

Terminal screw: Steel galvanized with Cr<sup>3+</sup> plated

Insulator body(housing): Polyamide (Glass filled)(UL94V-0)

Electrical

Voltage rating: 250VAC

Current rating: 15 Amps/way max

Contact resistance: 20mΩ (max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 16-22AWG

Mechanical:

Torque: 6kgf.cm/M3.0

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

U132 - 1 - G XX - X X X 0

A Black Pa66  
B Black Pbt

1 With flange  
2 Without flange

1 "-"Screw Cr<sup>3+</sup>  
2 "-/+ "Screw Cr<sup>3+</sup>  
3 "-"Screw Ni Plated  
4 "-/+ "Screw Ni Plated

02 2Pin  
To To  
32 32Pin

**WELINK** 上海拓尔普电子科技有限公司  
Welink International Co., LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED:	NAME: U132-1 Pitch 7.62mm series With flange
	CHECKED:	
	DRAWN: Yang Ming 2013,09,28	
	UNITS: mm	REV: A
	SCALE: 2.5 / 1	PAGE: 1 / 1
		PART NO: U1321GXX21X0
		DWG NO: 9U1321001A