


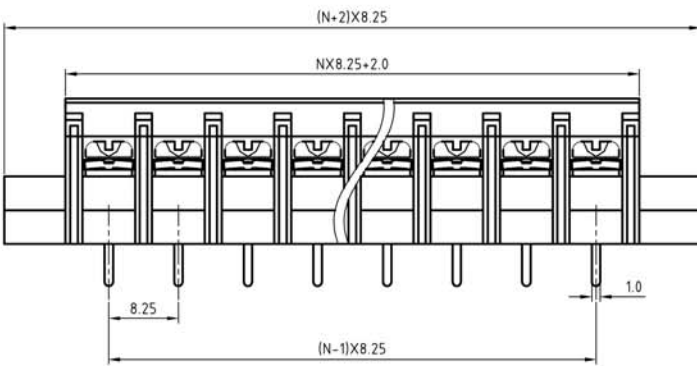


SIGN	DESCRIPTION	DATE	APPROVER
△	变更前是脚子用U1411, 变更后脚子用U2401新开	2014.12.11	YangMing

N=Number of contacts

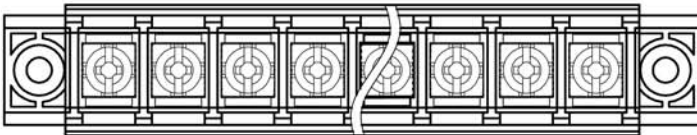

P.C.B LAYOUT

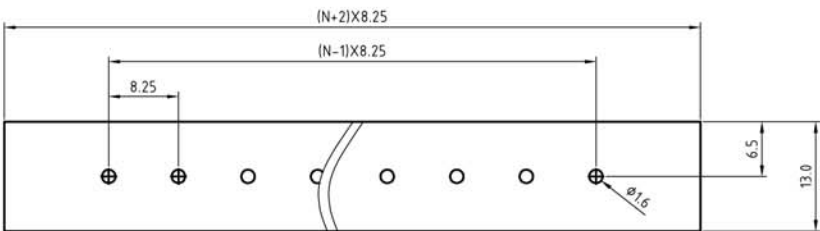

Technical Data:

Material:

Terminals: Copper Alloy, Tin Plated
Terminal screw: Steel galvanized with Cr3+ plated
Cover: PC (UL94V-0)

Insulator body (housing): Polyamide (Glass filled) (UL94V-0)

Electrical

Voltage rating: 250VAC
Current rating: 20 Amps/way max
Contact resistance: 20m Ω (max)
Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
Wire range: 14-22AWG

Mechanical:

Torque: 7.0kgf.cm/M3.0
Operating temperature: -40°C to +105°C
Soldering reliability:
Test temperature= 250°C ± 10°C
5 seconds max

Ordering Information:

U240 -1 - H XX - X X X 0

- A Black Pa66
- B Black Pbt
- 1 With flange
- 2 Without flange
- 1 "-" Screw Cr³⁺
- 2 "-/+ "Screw Cr³⁺
- 3 "-" Screw Ni Plated
- 4 "-/+ "Screw Ni Plated
- 02 2Pin
- To To
- 32 32Pin

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE X: ±0.50 X.X: ±0.30 X.XX: ±0.20 X°: ±1°	APPROVED:	NAME: U240-1 Pitch 8.25mm series With flange PART NO: U2401HXX21B0 DWG NO: 9U2401101B
	CHECKED:	
	DRAWN: Yang Ming 2014,12,11	
	UNITS: mm REV: B	
SCALE: 1.5 / 1	PAGE: 1 / 1	