
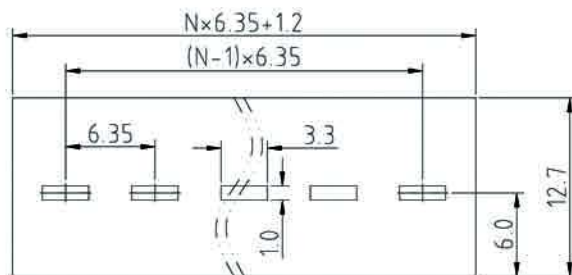
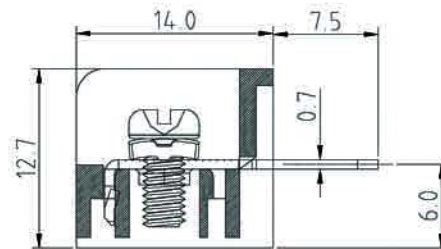


N=Number of contacts

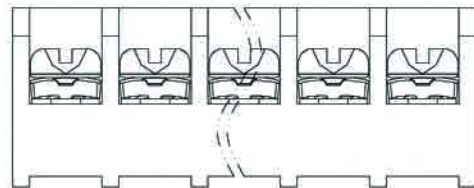

P.C.B LAYOUT

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Terminals: Copper Alloy Tin plated

Terminal screw: Steel galvanized with Cr3+ plated

Insulator body(housing): Polyamide (Glass filled)(UL 94V-0)

Electrical

Voltage rating: 250VAC

Current rating: 10 Amps/way max

Contact resistance: 20m Ω (max)

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Wire range: 18-22AWG

Mechanical:

Torque: 7kgf.cm/M3.0

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C ± 10°C

5 seconds max

Ordering Information:

U 3 2 2 - 4 - F X X - X X X 0

A Black Pa66

B Black Pbt

1 With flange

2 Without flange

1 "-"Screw Cr<sup>3+</sup>

2 "-/+ "Screw Cr<sup>3+</sup>

3 "-"Screw Ni Plated

4 "-/+ "Screw Ni Plated

02 2Pin

To To

32 32Pin

**WELINK**

上海拓尔普电子科技有限公司

Welink International Co.,LTD.

TOLERANCE X ±0.50 X.X ±0.30 X.XX ±0.20 X° ±°	APPROVED:	NAME: U322-4 Pitch 6.35mm- Without flange series
	CHECKED:	
	DRAWN: Ling Yu 2014,01,04	
	UNITS: mm REV: A	
	SCALE: 2.5 / 1	PART NO: U3224FXX22X0 DWG NO: 9U3224F01A